





GENUINE SCUFF PLATE

INSTALLATION AND USER'S INSTRUCTIONS

Thank you for purchasing a Genuine Mazda Accessory.
Before removal and installation, be sure to thoroughly read these instructions.
Please read the contents of this booklet to properly install and use the scuff plate. Your safety depends on it.
Keep these instructions with your vehicle records for future reference.

WARNING

- There are several  **WARNING** and  **CAUTION** sections in this booklet concerning safety when installing or removing the scuff plate. Always read and follow the instructions in order to prevent injuries, accidents, and possible damage to the vehicle.
 -  **WARNING:** Indicates a situation in which serious injury or death could result if the warning is ignored.
 -  **CAUTION:** Indicates a situation in which bodily injury or damage to the vehicle could result if the caution is ignored.
- For areas indicating the tightening torque in this instruction manual, tighten to the specified torque using a torque wrench. For areas in which the tightening torque is indicated inside parentheses (), the tightening torque is indicated as a reference value, however tightening using a torque wrench is not necessary
- Do not modify the scuff plate.
- Do not install the scuff plate in any way other than described in the following instructions.
- If in doubt, please contact your Mazda dealer to install the accessory in order to prevent errors in installation.
- If you have any questions about the use of the accessory, ask your Mazda dealer for proper advice before using it.
- Mazda and its suppliers are not responsible for injuries, accidents, and damage to persons and property that arise from the failure of the dealer or installer to follow these instructions.
- To ensure safety and reliability of the work, installation, removal and disposal work must be carried out by an Authorized Mazda Dealership.
- Be careful not to lose removed parts, and be sure that they are kept free of dirt, scratches, or damage.

PART NAME: SCUFF PLATE
PART NUMBER: D43N V1 370
VEHICLE: MAZDA2

NOTE

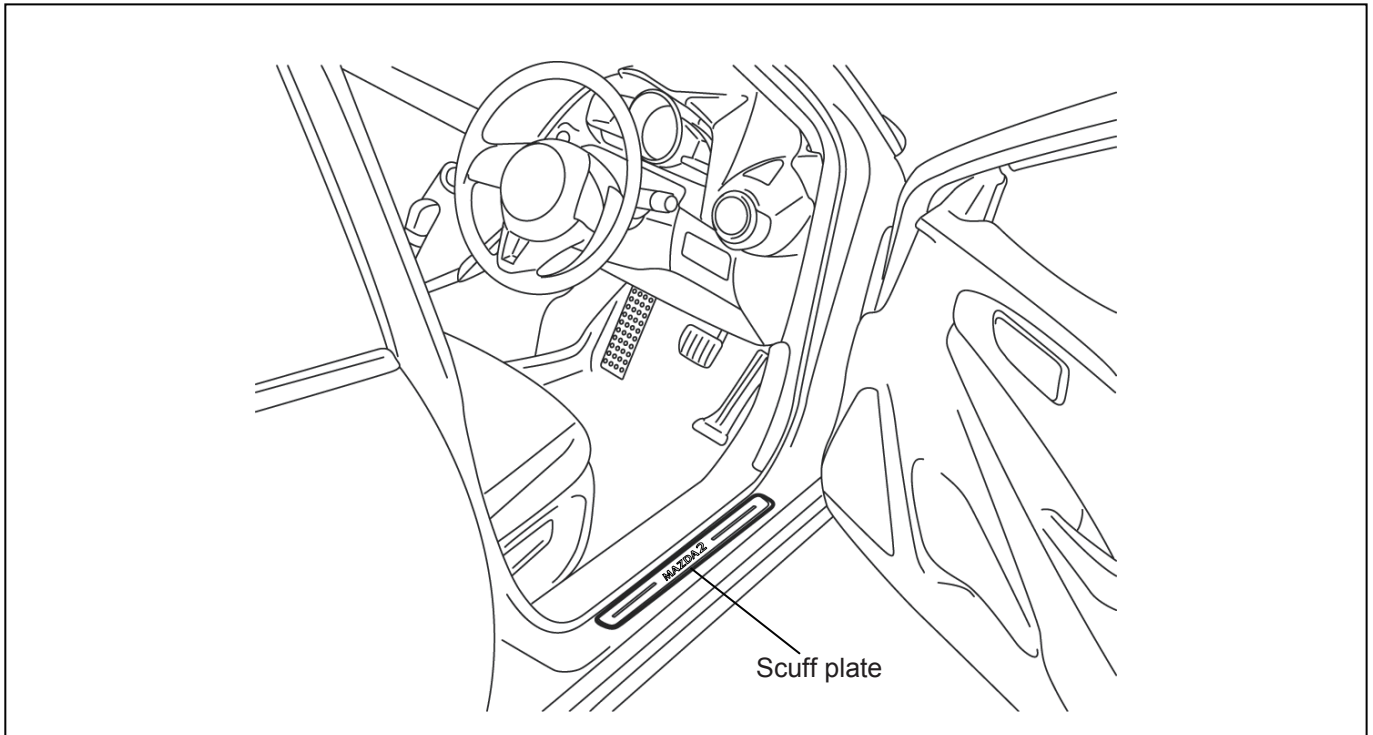
To the dealer

- Please give these instructions to the customer after installation.

To the customer





- Keep these instructions after installation. The instructions may be necessary for installing other optional parts or removal of this accessory.
- Should the vehicle or this accessory be resold, always give these instructions to the next owner.

1. INSTALLATION VIEW



2. PARTS

- Before installation, verify that the kit includes all the following parts and that they are free of dirt, scratches, or damage.

Part	Part name	Qty	Part	Part name	Qty
	Scuff plate (RH, LH common)	2		Template	1
	Installation Instruction	1		Multi language installation manual	1






3. BEFORE INSTALLATION

■ REQUIRED TOOLS

- ☆ Scissors

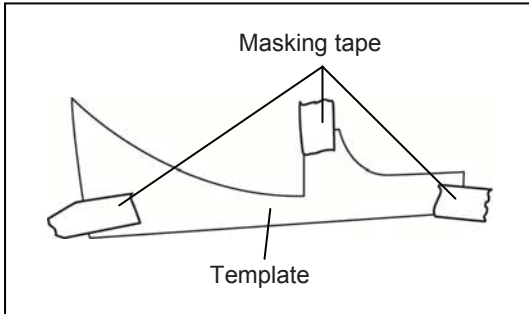
⚠ CAUTION (Double-sided adhesive tape usage)

* Adhesion surface means the door or bumper, and part means the accessory.

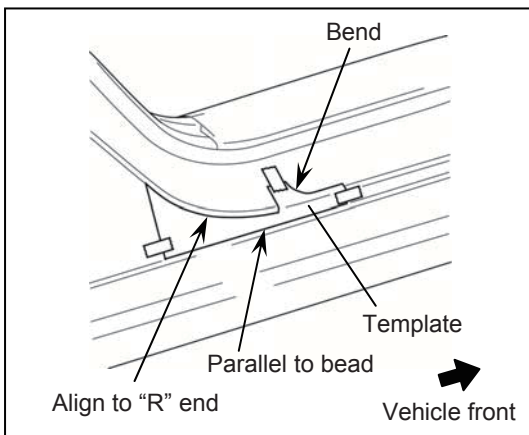
<p>Avoid ambient temperatures of 15 degrees C or less</p> <p>Because the adhesiveness of the adhesive depends on the softness of the resin, the adhesiveness decreases in cold temperatures (15 degrees C or less). Therefore, avoid servicing in ambient temperatures of 15 degrees C or less. If servicing has to be performed in ambient temperatures of 15 degrees C or less, heat the adhesion surfaces including the kit part sufficiently.</p>	<p>Adhere evenly</p> <p>To assure sufficient adhesiveness of the double-sided adhesive tape, press adhesive surface of the tape to adhesion surface evenly. In particular, press sufficiently at the ends of the double-sided adhesive tape and where the adhesion surface is curved.</p>	<p>Clean adhesion surface</p> <p>If dirt or grease is left on the adhesion surface it will stick to the double-sided adhesive tape and decrease the tape's adhesive strength. Clean the adhesion surface before adhering the tape. Use mild detergent for the interior, and Isopropyl alcohol (IPA) for the exterior.</p>
		
<p>Keep tape clean</p> <p>If you touch the adhesive surface, oil on the skin will adhere to the adhesive and decrease the adhesive strength. When using cotton gloves, fiber or dirt may adhere to the tape. Be careful to keep the adhesive surface of the double-sided tape clean.</p>	<p>Handling after installation</p> <p>Because 24 hours is required for the installation to set, after installation, do not wash the car or park the car under rain during the 24 hour period. Otherwise, the adhesive strength will not be stable. Never re-adhere the part once its been installed. Otherwise, the adhesive strength will be extremely low.</p>	
		

4. SCUFF PLATE INSTALLATION

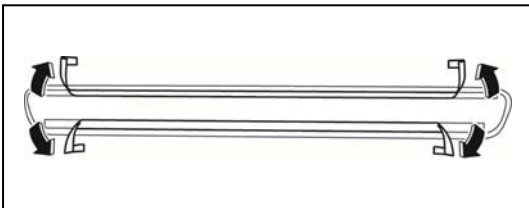
- The figure shows the right side; however the procedure is the same for the left side.



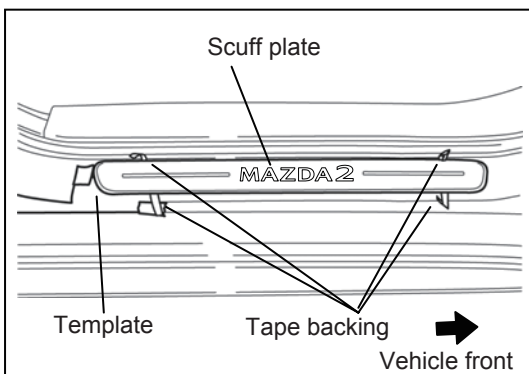
1. Cut out the template along the cut line using scissors, and adhere masking tape to the three locations shown in the figure.
2. Fully open the door.
3. Degrease the installation area using IPA (isopropyl alcohol).



4. Align the template to the body line and affix it.



5. Partially pull back the tape backings at the corners of the scuff plate as shown in the figure.



6. Set the scuff plate along the line of the template. At this time, verify that the scuff plate is set parallel.
7. Peel off the tape backings and press fit the scuff plate sufficiently.
8. Remove the template.

5. TO THE CUSTOMER

- If the scuff plate is dirty, clean it the same as the body surface.
- Do not use thinner or any other solvent and compounds to clean the scuff plate. The scuff plate may be damaged.